

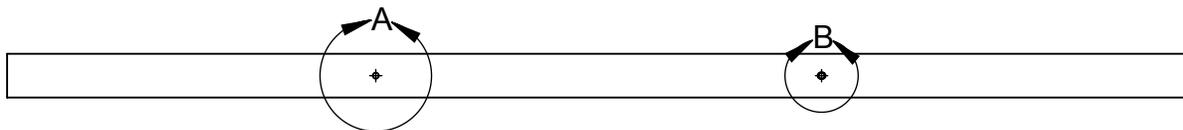


INSTALLATION INSTRUCTIONS


Model: **CP7100**
Fixture Family: **NACELLE**
Document Description: Installation Instructions for
LED Series Luminaires

VISA LIGHTING
AN OLDENBURG GROUP COMPANY
1717 West Civic Drive Milwaukee, WI 53209
414-354-6600
Design Modification Rights Reserved
© Visa Lighting 2016

Nacelle Pendant CP7100 - Series

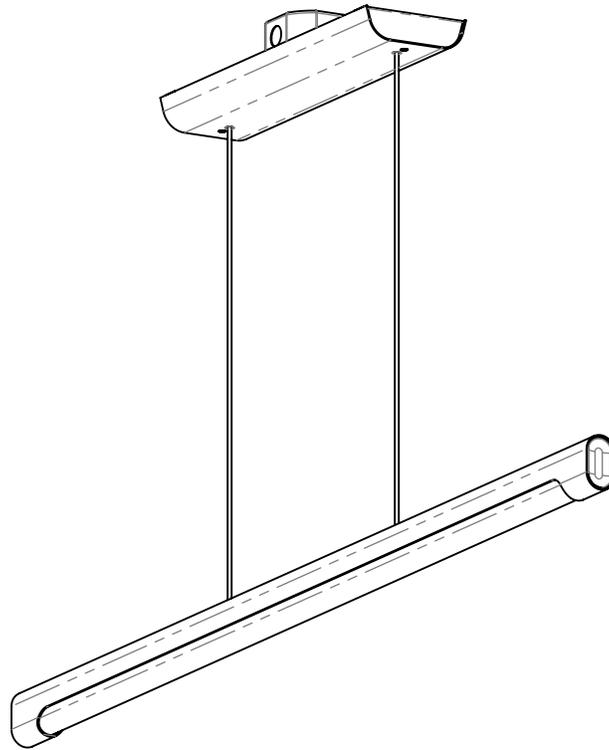

DETAIL A
Low voltage Power Output
SCALE 1 : 2



DETAIL B
Low voltage Power Input
Enlarged Hole
SCALE 1 : 2

Drawing: 762353XX

Rev: A

Sheet: 1 of 4

Eng: DEF

Date Drawn: 10/12/20



When using electrical equipment, basic safety precautions should always be followed, including the following:

- Read all instructions carefully before installing and save for future use.
- Make sure all connections are in accordance with the National Electrical Code and local regulations.
- To avoid possible electric shock, be sure the power supply is turned off before servicing or installing the fixture.
- Service should be performed by qualified personnel.
- These instructions may not cover all details or variations. If additional information is needed, please contact Visa Lighting.

INSTALLATION INSTRUCTIONS

Model: **CP7100**
 Fixture Family: **NACELLE**
 Document Description: Installation Instructions for
 LED Series Luminaires

Drawing: 762353XX

Rev: A


Sheet: 2 of 4

Eng: DEF


Date Drawn: 10/12/20

Dimensions


Canopy with Enclosed Drivers

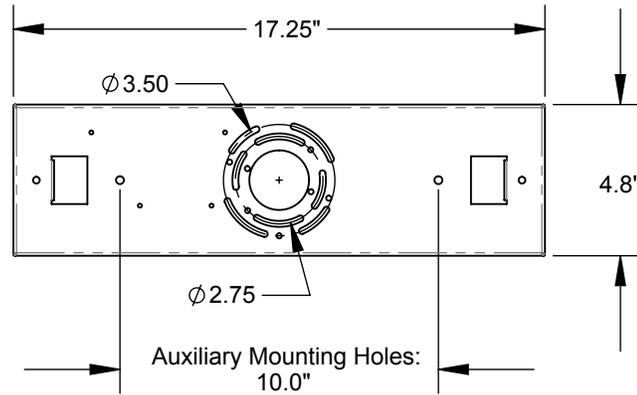

Remote Power Supply Box

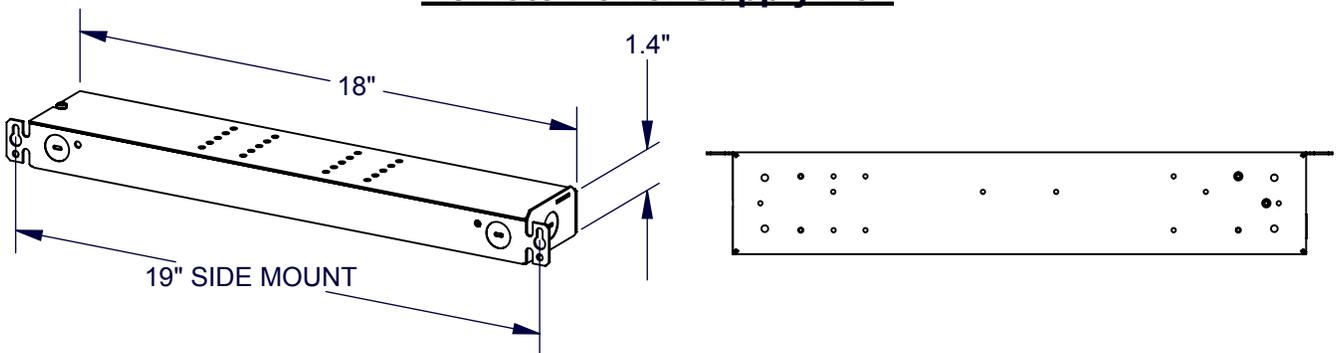

Fixture Mounting Canopy Distance

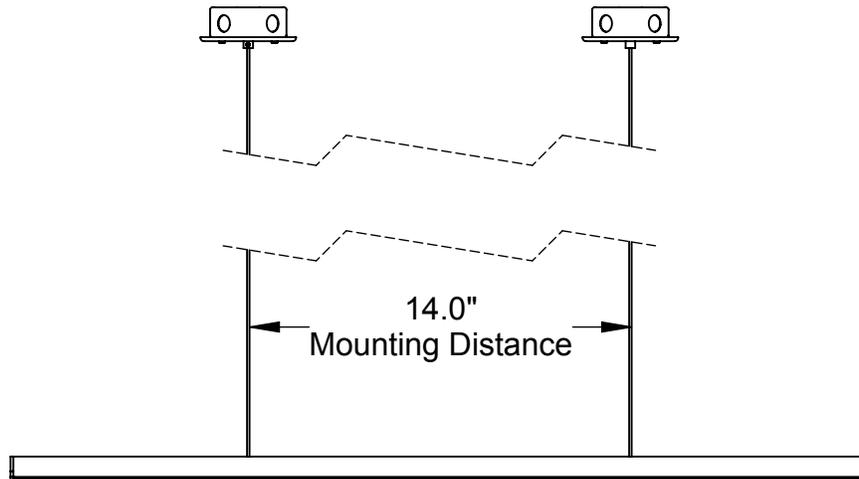

- !** When using electrical equipment, basic safety precautions should always be followed, including the following:
- Read all instructions carefully before installing and save for future use.
 - Make sure all connections are in accordance with the National Electrical Code and local regulations.
 - To avoid possible electric shock, be sure the power supply is turned off before servicing or installing the fixture.
 - Service should be performed by qualified personnel.
 - These instructions may not cover all details or variations. If additional information is needed, please contact Visa Lighting.


INSTALLATION INSTRUCTIONS

Model: **CP7100**
Fixture Family: **NACELLE**
Document Description: Installation Instructions for
LED Series Luminaires

VISA LIGHTING
AN OLDENBURG GROUP COMPANY
1717 West Civic Drive Milwaukee, WI 53209
414-354-6600
Design Modification Rights Reserved
© Visa Lighting 2016


Canopy Parts

- Ba - Canopy Kit
- Bb - Cover
- Bc - Cover Screws

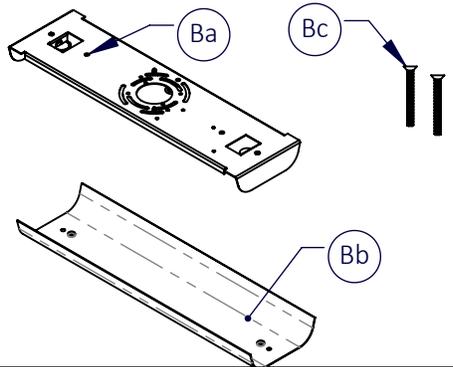

Standard Mounting

Components may vary depending on options ordered.

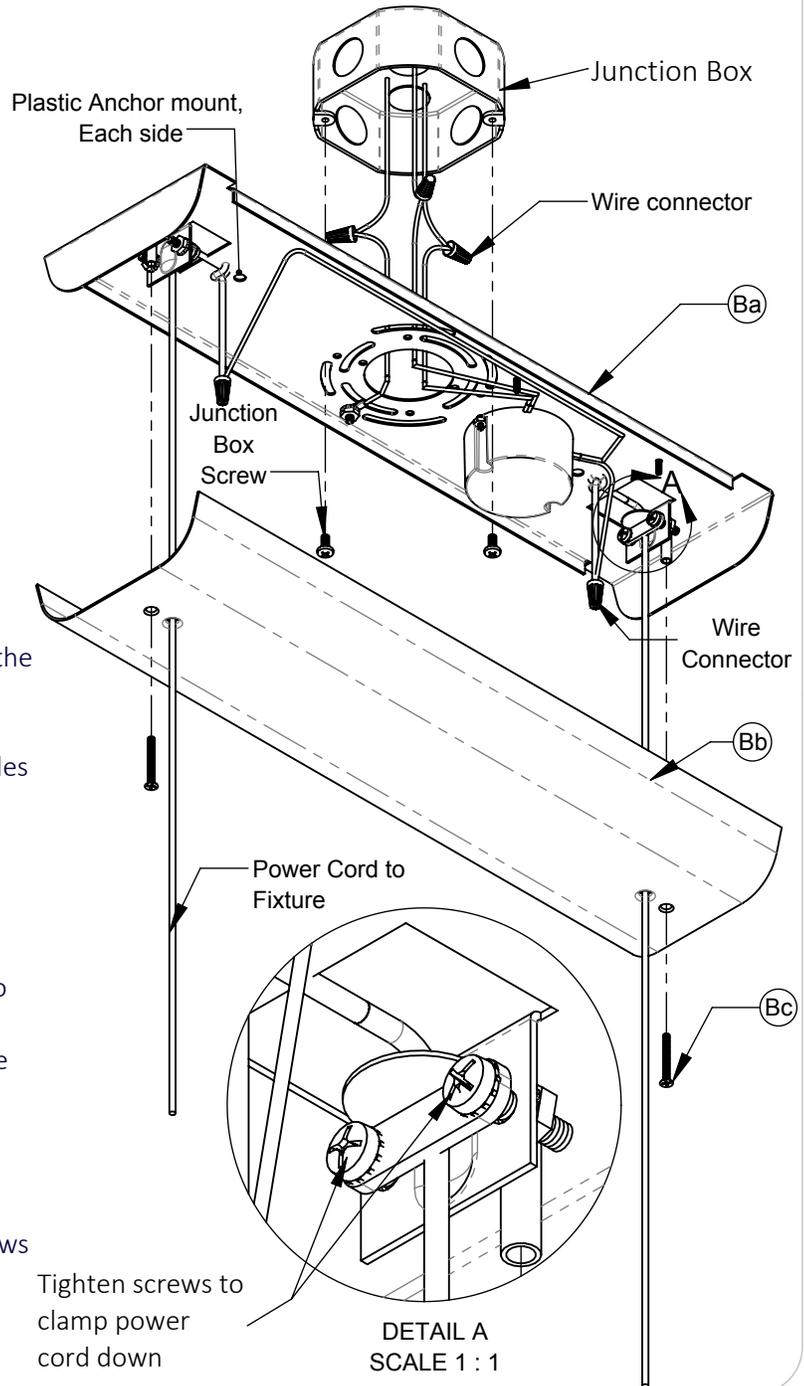

1. Remove the Cover Screws (Bc) holding onto the Cover (Bb). Save for later.
2. Fasten the Canopy Kit (Ba) assembly to junction box (screws provided by others).
3. Connect the White, Black and Green wires per local and national codes and then push them into the junction box.
4. Pull the fixture power cords through the two holes in the cover (Bb) and through the clamp on each side of the canopy kit (Ba). Tighten screws on each clamp to hold power cord down and support the weight of the fixture.
5. Connect the driver and power cord wires. Red to Red, Black to Black. Low-voltage DC power is supplied through one cord and returns through the opposite cord. The input power cord (+) enters through a slightly larger hole in the top of the housing than the return (-) cord.
6. Lift the Cover (Bb) in place and reinstall the screws (Bc) that were removed in step 1.

Drawing: 762353XX

Rev: A

Sheet: 3 of 4

Eng: DEF

Date Drawn: 10/12/20

When using electrical equipment, basic safety precautions should always be followed, including the following:

- Read all instructions carefully before installing and save for future use.
- Make sure all connections are in accordance with the National Electrical Code and local regulations.
- To avoid possible electric shock, be sure the power supply is turned off before servicing or installing the fixture.
- Service should be performed by qualified personnel.
- These instructions may not cover all details or variations. If additional information is needed, please contact Visa Lighting.


INSTALLATION INSTRUCTIONS

Model: **CP7100**
Fixture Family: **NACELLE**
Document Description: Installation Instructions for
LED Series Luminaires

VISA LIGHTING
AN OLDENBURG GROUP COMPANY
1717 West Civic Drive Milwaukee, WI 53209
414-354-6600
Design Modification Rights Reserved
© Visa Lighting 2016

RMD (Remote Mounted Driver) Option- Fixture Mounting


1. Fasten universal mounting plate to junction box with the junction box mounting screws (by others).
2. Adjust the height of the fixture by tightening the set screw on the side of the strain relief.
3. Ensure that an Overhand Knot is above the strain relief to prevent catastrophic failures.
4. Make all wire connections per local and national codes.
5. Lift Canopy in place and secure with canopy screws.

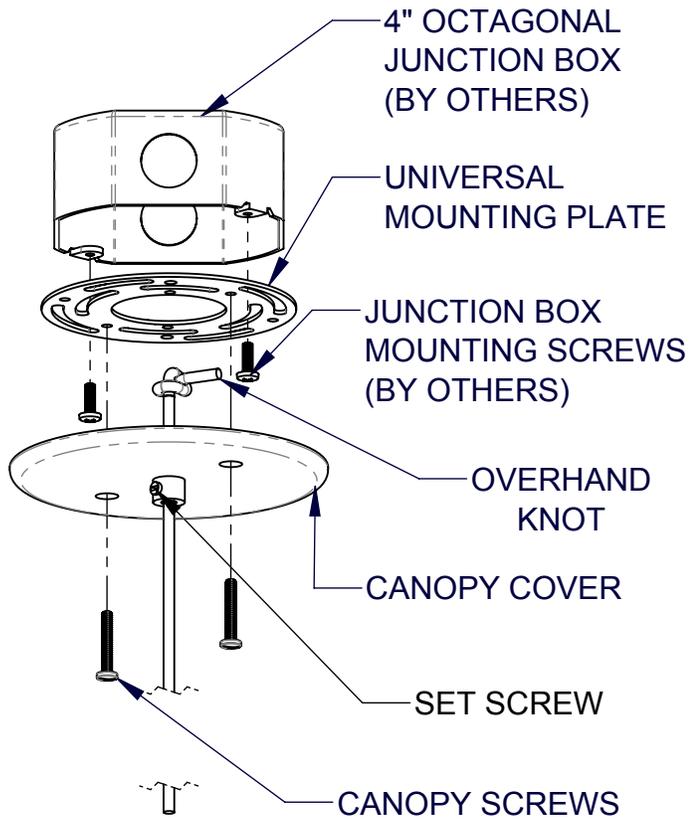

RMD (Remote Mounted Driver) Option- Driver Box Mounting

Components may vary depending on options ordered.

1. Remove cover by removing the cover screw.
2. Mount remote box in an accessible area per local and national codes, use fasteners appropriate for the mounting surface (not included).
3. Make all wire connections per local and national codes.

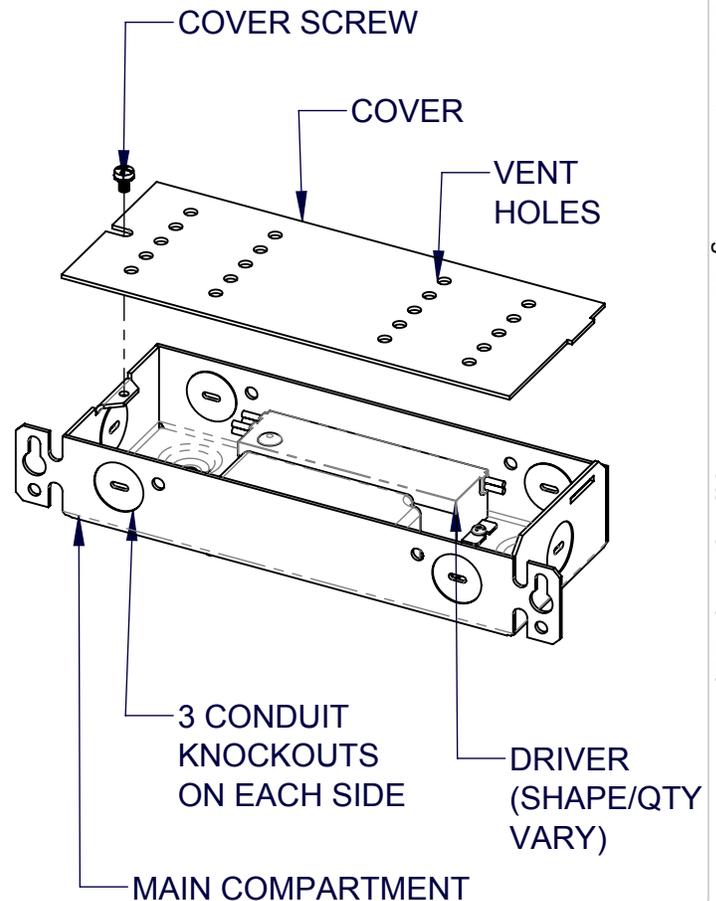

Drawing: 762353XX

Rev: A

Sheet: 4 of 4

Eng: DEF

Date Drawn: 10/12/20

When using electrical equipment, basic safety precautions should always be followed, including the following:

- Read all instructions carefully before installing and save for future use.
- Make sure all connections are in accordance with the National Electrical Code and local regulations.
- To avoid possible electric shock, be sure the power supply is turned off before servicing or installing the fixture.
- Service should be performed by qualified personnel.

• These instructions may not cover all details or variations. If additional information is needed, please contact Visa Lighting.